

How To Install Closet Clothes Rack or Repair Sag

For some reason, a sagging coat rod reminds us of a poor soul upon whose back rests the weight of the world. He somehow manages the weight, but develops a chronic case of stooped shoulders. To straighten him up, do the following:

Utensils

Screwdriver
Hammer

Ingredients

Piece of pipe, the length and diameter of original rod (either black or galvanized)
Paint thinner or cleaning fluid

Approximate Time:

How Far Is The Plumbing Supply House?

1. Remove all clothes from sagging hangrod.
2. Lift hangrod from holding brackets at side (Fig. 35A). If rod does not come away easily, it may be necessary to remove one bracket with hammer claw or screwdriver (Fig. 35B).
3. Take old wooden hangrod to plumbing supply house or hardware store that stocks pipes. Have pipe cut to exact dimensions of original hangrod. Home again, install pipe hangrod where the poor soul was before.

Note: It will be necessary to remove oil coating from new hangrod with paint thinner to prevent damage to clothing.

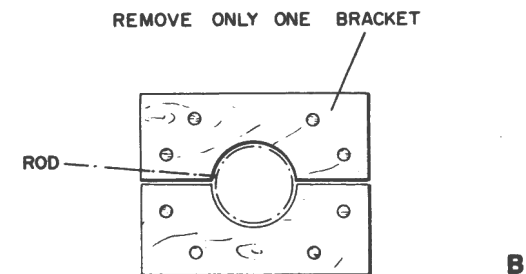
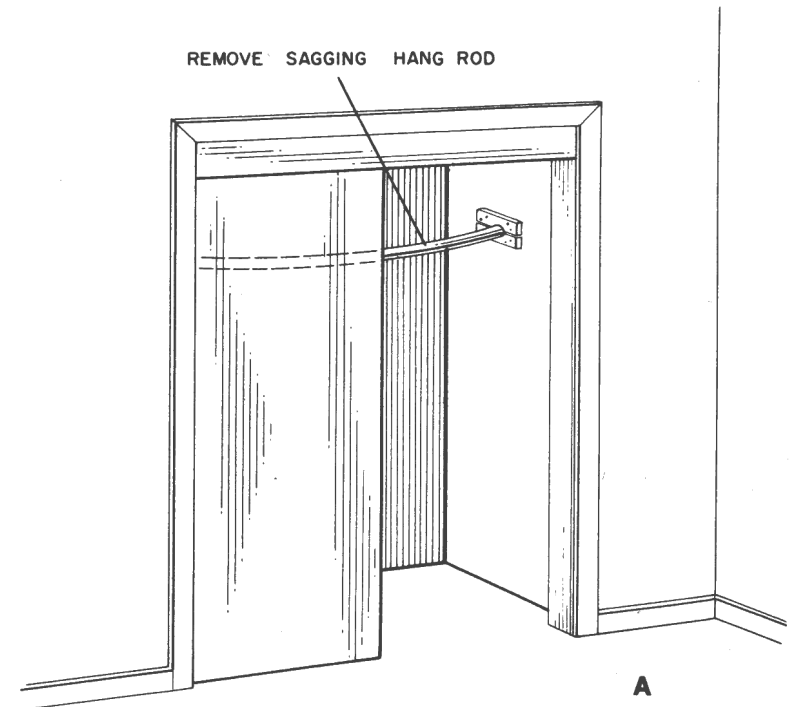


Figure 35.
Closet Repair: Clothes Rack Rod